


- ◆品牌：中联科创（ZLKC）
- ◆规格：4/3" C 型 f=12mm F2.8
- ◆多层镀膜，有效提高透过率
- ◆2000 万像素高品质影像
- ◆高对比度、大景深设计
- ◆畸变小于 0.1%
- ◆适用机器视觉，工业监控等

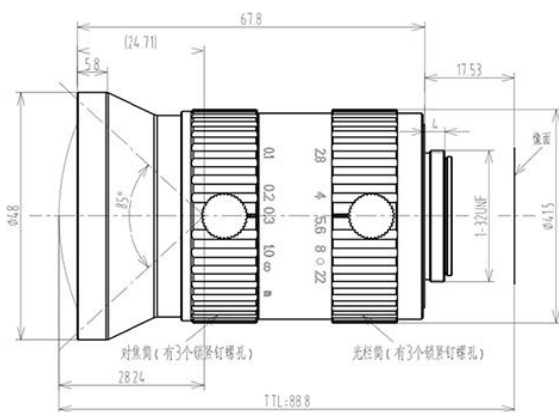

产品规格书:

2000 万像素 12mm 低畸变 FA 镜头 C Mount			物距 Working Distance	倍率 Optical Magnification	视野 4/3"Field of View(mm)	
型号 Model		KM1228MP20	mm	X	H	V
相机靶面 Image Size		4/3-inch	5000	0.002X	7158.8	5369.1
焦距 Focal length		12mm	2000	0.006X	2883.7	2162.8
光圈范围 F No.		F2.8-22	1000	0.012X	1458.6	1094.0
最短物距 M.O.D(m)		0.1-Inf.	900	0.013X	1316.1	987.1
控制方式 Operation	Iris	Manual 手动调整	800	0.015X	1173.6	880.2
	Focus	Manual 手动调整	700	0.017X	1031.1	773.4
视场角 Angle of View (D×H×V)	4/3"	83.4°×71.2°×56.3°	600	0.020X	888.6	666.5
	1"	66.1°×54.8°×42.3°	550	0.022X	817.4	613.0
	2/3"	47.9°×38.9°×29.6°	500	0.024X	746.1	559.6
畸变 Distortion		<1%	450	0.026X	674.9	506.2
光学后焦 BFL		10.6mm	400	0.029X	603.6	452.7
接口 Mount		C-Mount	350	0.033X	532.4	399.3
近摄视野 Object Dimension		461.1mm×345.8mm(WD=300mm)	300	0.038X	461.1	345.8
外形尺寸 Dimension		Φ48×67.8mm	250	0.045X	389.9	292.4
重量 Weight		245.0g	200	0.056X	318.6	238.9
滤镜尺寸 Filter Thread		—	150	0.072X	247.4	185.5
工作温度 Working Temperature		-20℃ ～ +60℃	100	0.103X	176.1	132.1